


Special applications

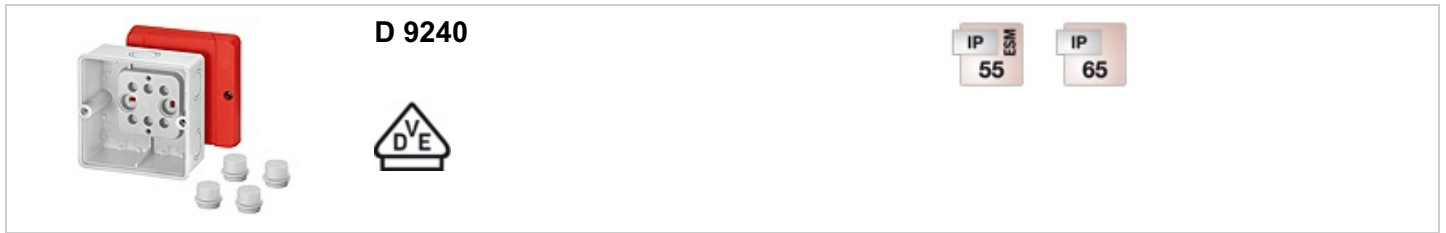


- Replaced by DK 0400 R from 31.12.2017
- without terminals
- for safety lighting circuits, for equipotential bonding conductors
- with red lid RAL 3000
- included cable entry: 4 ESM 25, sealing range Ø 9-17 mm
- for normal environment and protected outdoor
- colour: grey, RAL 7035


material	PS (Polystyrene)
degree of protection	IP 55 (ESM)
degree of protection	(see cable entry systems LES) IP 65
mounting width	69 mm
mounting height	76 mm
max. installation depth	45 mm
width	98 mm
height	98 mm
depth	61 mm
weight	0,141 kg
in accordance with	IEC 60670-22

Drawings


Dimension drawing

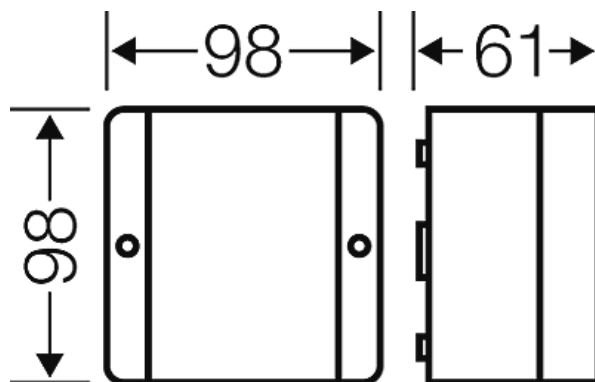


Special applications

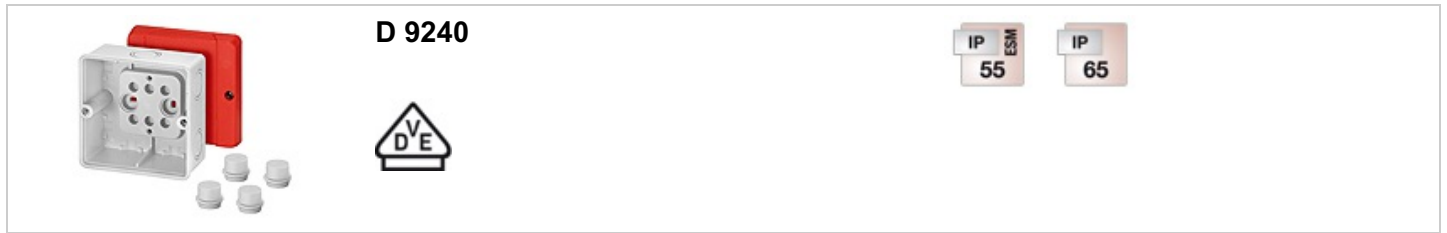

Detail mass

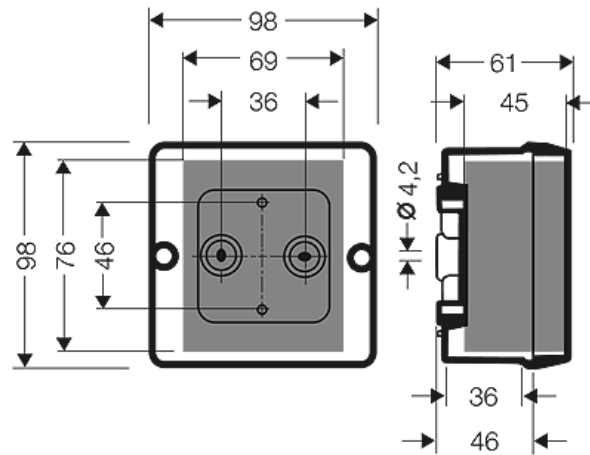



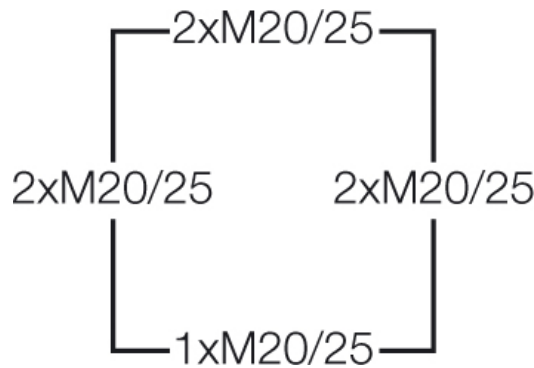

Box walls



Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water pressure: max. 100 bar, water temperature: max. 80° C, distance => 0,15 m, in accordance with the requirements IP 69, enclosure and cable glands at least IP 65
Ambient temperature	Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables

Special applications

	D 9240		
			

and insulated wires - corrosiveness of fumes - as per IEC 60754-2

Note:

For material properties see technical data.