

# Technical data sheet

## Cap nut cable gland, PG thread, light grey

Art.-Nr. 2024705



The quickest and most convenient way of providing strain relief and tightness with cable glands on junction boxes and housings is with the tried-and-trusted V-TEC VM cable glands from OBO. A protection rating of IP68 is achieved through the integrated sealing lip and the special OBO slat technology. Strain relief and tightness have been tested to DIN EN 62444.

The connection thread is a PG thread. Once screwed in place, the installation is there forever, as the optimum thread adjustment with the right pitch ensures permanent resistance to shaking.

Applications: From private housing with junction boxes up to industrial applications in the distributor cabinet.

Temperature range: -20 °C to +65 °C.



**PA** Polyamide

### Master data

Item no.	2024705
Type	V-TEC PG7 LGR
Description 1	Cable gland
Dimension	PG7
Colour	Light grey
RAL number	7035
Material	Polyamide
Material symbol	PA
Smallest sales unit	50,00 Piece
Weight	0,41 kg/100 pc.


# Technical data sheet

## Cap nut cable gland, PG thread, light grey

Art.-Nr. 2024705



### Technical data

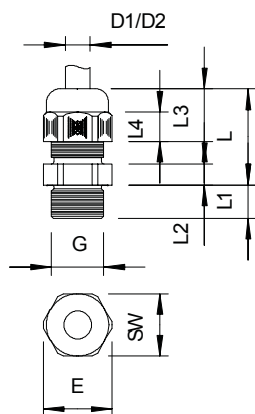

Dimension L min.	18,00 mm
Dimension L max.	23,00 mm
Dimension L1	8,00 mm
Dimension L2	5,00 mm
Dimension L3	12,60 mm
WAF	15,00 mm
Version	Straight
Type of seal	Sealing ring
Bend protection	<input type="checkbox"/>
Sealing range D	2,50 - 6,50 mm
Sealing range D	0,14 - 0,26 in
explosion-proof	<input type="checkbox"/>
Flat cable threaded connection	<input type="checkbox"/>
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 7
Thread type	PG
Thread length	8,00 mm
Thread increase	1,41 mm
Nominal thread size	7,00
Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Multiple sealing insert	<input type="checkbox"/>
With locknut	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Hexagonal corner dimension	16,50 mm
Protection rating	IP68
Splittable gland	<input type="checkbox"/>
max. permitted ambient temperature	-20,00 - 65,00 °C
Strain relief and wringing protection D2	3,00 - 6,50 mm
Strain relief option	<input checked="" type="checkbox"/>