


Technical data sheet

Cable gland, long PG thread



V-TEC L: with Pg connecting thread to DIN 40430
 Robust cap-nut cable gland with large sealing area,
 as well as strain relief and torsion protection for high sealing
 demands,
 gasket of chloroprene/nitrile rubber,
 moulded sealing, so no connection thread sealing ring needed,
 tested to VDE 0619
 Protection rating IP 68 at 5 bar for 1 hr.

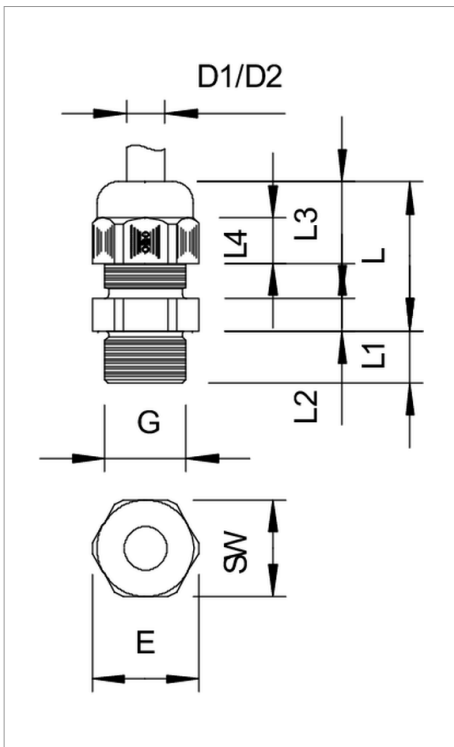

Type	Thread	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art-No.
V-TEC L PG7 SGR	Pg 7	Silver grey; RAL 7001	500	50	0.410	2024179
V-TEC L PG9 SGR	Pg 9	Silver grey; RAL 7001	500	50	0.670	2024187
V-TEC L PG11 SGR	Pg 11	Silver grey; RAL 7001	500	50	0.930	2024195
V-TEC L PG13 SGR	Pg 13,5	Silver grey; RAL 7001	600	50	1.090	2024209
V-TEC L PG16 SGR	Pg 16	Silver grey; RAL 7001	250	25	1.490	2024217
V-TEC L PG21 SGR	Pg 21	Silver grey; RAL 7001	300	25	2.330	2024225
V-TEC L PG29 SGR	Pg 29	Silver grey; RAL 7001	240	20	3.860	2024233
V-TEC L PG36 SGR	Pg 36	Silver grey; RAL 7001	120	10	7.750	2024241

PA Polyamide

/100

