

Technical data sheet

Combination arrester V25 4-pole 280 V with acoustic signalling

Item no. 5097193



Combination arrester consisting of lightning current and surge arrester type 1+2

- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- Suitable for TN network systems
- With audible signalling for function monitoring, signal tone can be turned off with 24 h repeat
- Plug-in arrester with dynamic cut-off unit
- Visual function display
- Voltage protection level < 900 V
- Encapsulated, non-extinguishing zinc oxide varistor arrester for use in standard distributor housings
- Labelled connections


Application example: Building with open-wire power supply or for setting up lightning protection equipotential bonding in residential buildings.



Additional product text 1

*Complete = cover and base
With audible alarm system

Dimensions

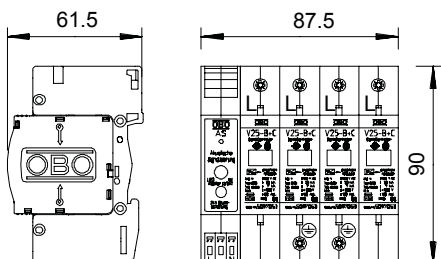

Master data

Item no.	5097193
Type	V25-B+C 4+AS280
Description 1	CombiController V25
Description 2	with acoustic signalling
Dimension	280V
Smallest sales unit (VG)	1,00 Piece

Technical data sheet

Combination arrester V25 4-pole 280 V with acoustic signalling

Item no. 5097193



Master data

Weight 70,00 kg/100 pc.

Technical data

	SPD to EN 61643-11	Type 1+2
	SPD to IEC 61643-11	Class I+II
	Nominal voltage	230,00 V
	Maximum continuous voltage AC	280,00 V
	Max. continuous operating voltage	280,00 V
	Nominal discharge current (8/20)	30 kA
	Maximum discharge current (8/20 µs)	50,00 kA
	Impulse discharge current (10/350)	7,00 kA
	Lightning surge current (10/350)	25,00 kA
	Arrester surge current (8/20) [total]	120,00 kA
	Protection level	< 0,9 kV
	Response time	< 25 ns
	Maximum back-up fuse	160,00 A
	Temperature range	-40-+80 °C
	Pole version	4
	Pole number	4,00
Version	4-pole with AS	
Version	4-pole	
Protection rating	IP20	
Protection rating	IP 20	
Blow-out	<input type="checkbox"/>	
Division unit TE (17.5 mm)	5	
Remote signalling	<input type="checkbox"/>	
Telecommunications contact	<input type="checkbox"/>	
Connection cross-section, flexible	2,50 - 25,00 mm ²	
Connection cross-section, rigid	2,50 - 35,00 mm ²	
Connection cross-section, multi-wire	2,50 - 35,00 mm ²	
Signalling on device	Optical and acoustic	